

1. GENERAL INFORMATION

1.1 Dealer Information

Contact Name

Date (MM/DD/YY)

Phone

Email

Company

1.3 Project

Purchase Order#

Job Name

Location


Notes

STANDARD FEATURES


Hydraulic 2:1 roped full 2-stop elevator package, 1,000lbs capacity, variable speed valve, submersed motor, automatic LED cab lighting, automatic emergency cab lowering, full automatic functionality, illuminated stainless steel car operator panel with phone and DPI, illuminated stainless steel call stations with DPI, 4 LED pot lights, solid stainless steel handrail.

2. BASICS

2.1 FINISHED HOISTWAY DIMENSIONS

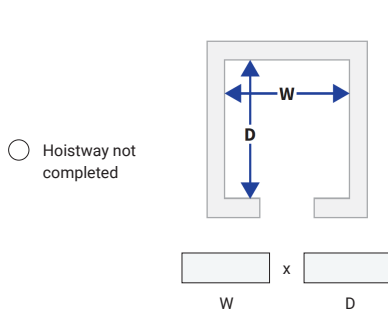

2.2 RAIL LOCATION



2.3 LANDINGS

2

3

4

HOISTWAY CONSTRUCTION

Wood

Concrete

2.4 CAB MODEL DIMENSION

Standard:

36 x 36

36 x 42

36 x 48

Custom:* 36-50" d x 36-42" w

depth x width

*code limit cab to 15sqft

2.5 CAB CONFIGURATION

Front Opening

Pass Through (2 Gates)

90 Degrees (2 Gates)

2.6 CAB HEIGHT & OVERHEAD REQUIREMENTS

CAB HEIGHT	OVERHEAD REQUIREMENTS	
<input type="radio"/> 7' (84")	<input type="radio"/> 8' (96")	<input type="radio"/> 8'7 (104")
<input type="radio"/> 8' (96")	<input type="radio"/> 9' (108")	<input type="radio"/> 10' (120")

CAB GATE CAB AUTO DOORS

2.7 CAB FINISHES

White Chocolate

Dark Chocolate

Unfinished MDF (Paint Grade)

Urban Vibe

Nutmeg

2.8 GATE FINISHES

Polymer White

Stainless Steel

Clear Acrylic

2:3 speed doors Standard

2.9 MACHINE ROOM ADJACENT (15ft)

Yes


No

Distance

IMPORTANT

OVERHEAD: Minimum overhead requirement in residential builds is 96 in. Some door models require 104 in.
PIT DEPTH: Minimum depth requirement in residential builds is 12 in.

*OVERHEAD - the distance from the finished floor to the top of the hoistway on the top landing.

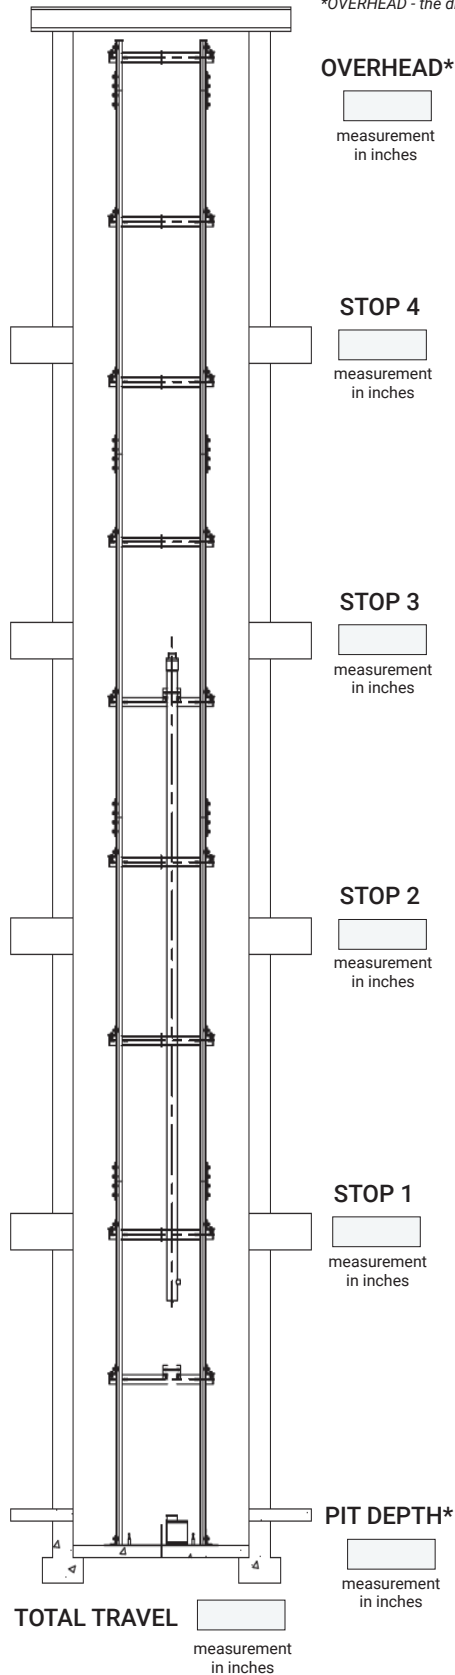

2.10 CAB DOORS

- Manual 4Panel Gate (select finish on previous page) - Standard
- Automatic 4Panel Gate (select finish on previous page)
- 2-Speed Full Automatic SS (requires 62" wide hoistway)
- 3-Speed Full Automatic SS (requires 54" wide hoistway)

NOTE: SS DENOTES STAINLESS STEEL


2.11 LANDING DOORS

- Locks Only - Door by Others - Standard
- 36" Wooden Door Jambs
- 2-Speed Full Automatic SS (requires 62" wide hoistway)
- 3-Speed Full Automatic SS (requires 54" wide hoistway)

NOTE: 2-SPEED AND 3-SPEED MUST MATCH CAB DOORS


2.12 LANDING DOOR SWINGS

- | | | |
|--------|----------------------------------|---------------------------------|
| Stop 4 | <input type="radio"/> Right Hand | <input type="radio"/> Left Hand |
| Stop 3 | <input type="radio"/> Right Hand | <input type="radio"/> Left Hand |
| Stop 2 | <input type="radio"/> Right Hand | <input type="radio"/> Left Hand |
| Stop 1 | <input type="radio"/> Right Hand | <input type="radio"/> Left Hand |

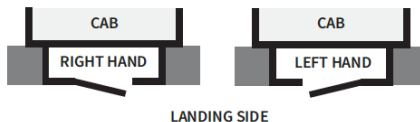

2.13 LANDING DOOR LOCATION

- | | | | | |
|--------|-------------------------|-------------------------|-------------------------|-------------------------|
| Stop 4 | <input type="radio"/> A | <input type="radio"/> B | <input type="radio"/> C | <input type="radio"/> D |
| Stop 3 | <input type="radio"/> A | <input type="radio"/> B | <input type="radio"/> C | <input type="radio"/> D |
| Stop 2 | <input type="radio"/> A | <input type="radio"/> B | <input type="radio"/> C | <input type="radio"/> D |
| Stop 1 | <input type="radio"/> A | <input type="radio"/> B | <input type="radio"/> C | <input type="radio"/> D |



5110 Atlantic Ave. Raleigh, NC 27616
 1-800-790-1635 | AmeriGlide.com

*PIT DEPTH - minimum depth requirement in residential builds is 12 in.